


TK-PS4C

QUICK START GUIDE

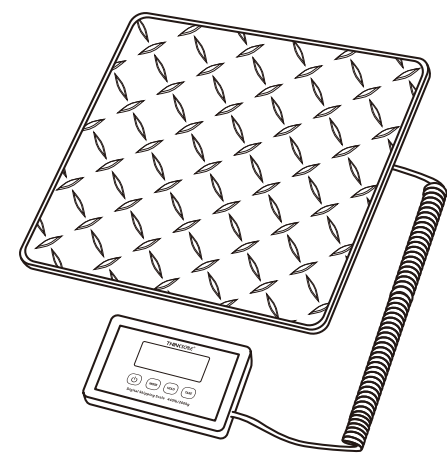


THANK YOU

Thanks for purchasing the THINKSCALE Quick Start Guide! This User Guide is designed to get you up and running quickly with your scale. Scales are precision instruments and require proper care and skill to get the best results. If you have questions or need support, please feel free to reach out our.customer support: www.thinkscale@outlook.com


Install Battery

1. Open battery compartment.
2. Put 2 AAA batteries in the scale as Per the "+" "-" indication.
3. Put back battery compartment.



Key Descriptions


- Turns the scale ON and OFF.
- Changes the weighing unit.
- Lock the value on the screen.
- Zero's the scale. Also subtracts the weight of an empty container (see Tare Function).




Operation

1. Place the scale on a flat, level surface and press the key to turn the scale on.
2. You are ready to weigh once the start-up process completes and the scale goes to zero.
3. Place the quantity to be weighed on the weighing platform.
4. Wait a couple seconds for the display to stabilize before taking a weight reading.

Turning Scale On



Mode Setting




Mode Setting


Press the key to change the scales displayed unit of measure.
Units: kg(kilogram) lb(pound): oz(ounce) lb(pound)

Tare Weighing Function


1. Turn the scale on, and place a container on the platform.



2. Press button to reset the displayed weight on the scale back to zero.



3. Add items into the container, the weight of the item will be displayed.




Hold Function


1. Turn on the scale.
2. Press button to turn on the auto hold function.




- 3.Put the package on the weighing platform, the reading will be locked on the display even the package is took away.

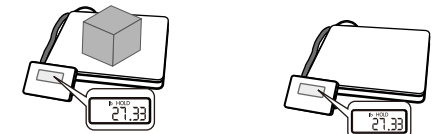

4. Press button to unlock.



Calibration



- 1.Press to turn the scale on and wait for the scale to stabilize.
- 2.Press and hold key for 5 seconds, then release the key after the screen display "CAL".
- 3.When the zero point code value is displayed, press the key, then the calibration unit will flash.
- 4.Press key again to choose calibration unit (10kg or 20lb).
- 5.Place the required calibration weight on the center of the platform.
- 6.The display will show" PASS" then return to normal weighing mode.

Auto-off Setting

1. Turn on the scale.
2. Press and hold button, "0/60/180/300" will be displayed repeatedly.
3. Release the button until the display shows the time you want. (If "0"is selected, the auto-off function will be disable.)
4. The display will show "PASS", then return to normal weighing mode.

*By default,the postal scale will not turn off automatically.
* When the adapter is connected, the scale will not turn off automatically.

Q&A

- Problem:** Scale will not turn on.
Solution: Check the batteries.
- Problem:** Displayed weight fluctuates randomly.
Solution: Make sure your workspace is stable and free of any air currents or vibration.
- Problem:** Displayed weight is inaccurate.
Solution: Perform a calibration adjustmen.

Indication Message

Low battery indication: " " :
Low battery



Low battery indication: "Lo" :
Please replace the new batteries.



Overload indication: "0-Ld"
Please remove the object from the weighing tray immediately.



Things To Avoid



Unlevel Surfaces



Radio Frequency Interference



High Humidity



Air Currents



Vibration



Extreme Temps

Specifications

Max Capacity	440lb / 200kg / 440 : 15 lb:oz
Readability	0.02lb / 0.01kg / 0 : 1 lb:oz
Weighing Units	kg/lb/lb:oz
Dimensions	Overall: 12.1x12.1x0.98in(LxWxH) Platform: 11.6inX11.6in(LxW) Display: 2.3inX0.8in(LxW)
Power	2 x AAA Batteries、 AC Adapter
Warranty	2 Year Limited Warranty